

CS20 • CS24 CS26 RIBBED



CHOOSE YOUR OPTIONS

SPECIFICATIONS

	CS20	CS24	CS26
Plain Steel U-Factor	Unrated	Unrated	Unrated
U-Factor R-Value: T-Bond:	0.38 7.05 	0.38 7.05 	0.38 7.05 
Thickness	2 inches	2 inches	2 inches
Maximum Width	40 ft 2 in	24 ft 2 in	16 ft 2 in
Exterior Steel	20 gauge	24 gauge	26 gauge
Warranty* <i>Excludes Springs</i>	10 years	10 years	25 years

*For full warranty details contact your Midland dealer




COLORS




*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



WINDOWS

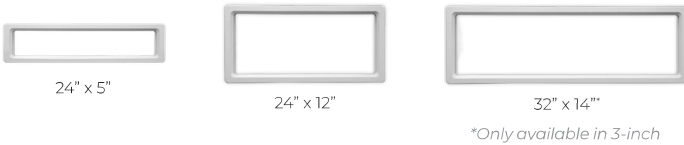

GLASS

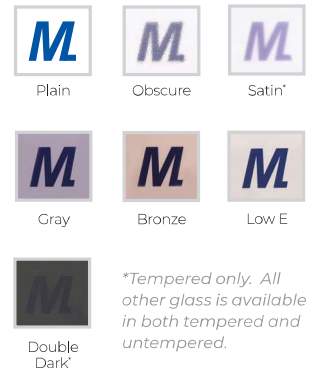

TRACK MOUNTING




TRACK CONFIGURATIONS



Standard Lift
For normal installations




Inclined Track
To follow pitch of roof



Hi-Lift
To put horizontal track as close to ceiling as possible



Vertical Lift
Full vertical rise where headroom is available



Low Headroom
For low-clearance installations